


Micro-duct with extra protection for indoor installation

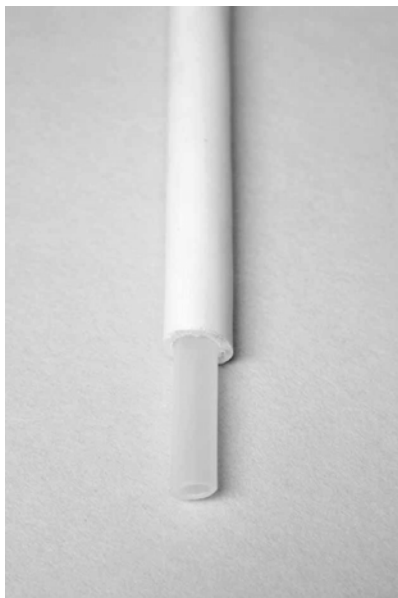

Design

Micro-duct

Duct

Halogen free, flame-retardant.
Colour red.

Sheath

Halogen free, flame-retardant.
Colour white.
Separator of non-woven tape between duct and sheath.

Fire resistance

IEC 332-1

Application

Micro-duct, which can be mounted on different type of wall materials, e.g. wood and concrete.

Installation materials used for electrical cables can also be used for mounting the duct.

Sheath material is of same type as used for electrical cables, which gives a discrete impression of the installation.

The product is fully compatible with the "FTTx" Ribbonet[®] concept.

(Connection box in picture is not included.)

Technical data

Micro-duct

Part no.	Diameter nom.			Weight (kg/100m)
	Duct Inner Diameter (mm)	Duct Outside Diameter (mm)	Sheath Outside Diameter (mm)	
MPB30251/1	3,5	5,0	8,0	3,6

Ordering information

Micro-duct

Part no.	Package	Length
MPB30251/1	Bobbin	500 m